

RETIGA-EXL

Rapid-Speed, High-Resolution IEEE-1394b FireWire® Digital CCD Camera

The **QImaging® Retiga-EXL** utilizes a cooled interline CCD and the remarkable speed of Lightwire™ 800 (an optimized version of the IEEE-1394b protocol). This low-noise camera's 1.4-million-pixel spatial resolution and 14-bit digitization are ideally suited for bio-imaging applications such as live-cell microscopy. The **Retiga-EXL** provides QImaging's hallmark combination of high performance and ease of use, enabling researchers to acquire quantitative results from their samples in a matter of seconds.

camera models


Includes: IEEE-1394b cable (9-pin to 9-pin), IEEE-1394b PCI card, power supply, QCapture Suite software, and access to SDK

■ Monochrome Retiga-EXL

Model: RET-EXL-L-M-14-C

camera options

- Extended Warranty
- RGB Filter

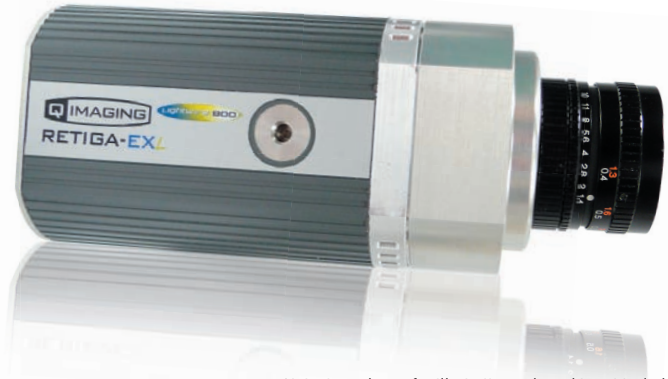

Note: Lens shown for illustration only and is not included.

features

benefits

High-Speed Readout

- Previewing & focusing in real-time
- 15fps full resolution @ 14 bits
- Ideal for automated imaging applications

Extended Quantum Efficiency

- Provides higher sensitivity than competitive interline cameras (especially in the near-infrared region)

IEEE-1394b FireWire Connection

- 800 Mb/s bandwidth capacity
- Enhanced low-noise performance
- Simple connectivity
- Ease of use & installation
- Portability with laptop computer

Low-Noise Electronics

- Quantitation & imaging of low-light-level signals

Peltier Cooling

- Reduces thermal noise for low-light long exposures while providing temperature stability

Flexible Exposure & Gain Control

- Optimal integration over a wide range of light levels

External Sync & Trigger

- Tight synchronization with flashlamps, automated filters, shutters, & microscope stages

Binning

- Increases sensitivity for quantitation & imaging of ultra-low-light signals
- Increases frame rate

Extensive Application Software Support

- Choose from a large selection of life science & industrial software for microscopy, machine vision, & video-streaming functions

"the first 30MHz, 14-bit, cooled ccd camera for bio-imaging"

RETIGA-EXL Specifications



| ccd sensor | |
|--------------------------------|---|
| Light-Sensitive Pixels | 1392 x 1040 |
| Binning Modes | 2, 4, 8 |
| ROI (Region of Interest) | From 1x1 pixels up to full resolution, continuously variable in single-pixel increments |
| Exposure/Integration Control | 10µs to 17.9min |
| Sensor Type | Sony® ICX285 front-illuminated interline CCD |
| Pixel Size | 6.45µm x 6.45µm |
| Linear Full Well (1x1 Binning) | 16,000e- (30MHz); 18,000e- (20MHz); 18,000e- (10MHz) |
| Read Noise | 6.5e- (10MHz) |
| Dark Current | 0.15 e-/pix/s |
| Cooling @ 25°C Ambient | 0°C (regulated) |
| Digital Output | 8 bits/14 bits |
| Readout Frequency | 30, 20, 10MHz |
| Frame Rate | 15fps full resolution @ 14 bits (30MHz) |

| camera | |
|--|--|
| Black-Out Mode | Turns off all LEDs on camera to reduce reflection during low-light applications; software controlled |
| Computer Platforms/ Operating Systems* | Windows® XP and Vista (32 bits/64 bits) Mac OS 10.4 |
| Digital Interface | IEEE-1394b FireWire (two ports with simultaneous camera control) |
| External Trigger | TTL Input |
| Trigger Types | Internal, Software, External (Edge-Hi/Edge-Low/Pulse-Hi/Pulse-Low/Strobe-Hi/Strobe-Low) |
| External Sync | TTL Output |
| External RGB Filter Control | Support for RGB filter |
| Analog Gain Control | 0.8 to 34.7x |
| Optical Interface | 2/3", C-mount optical format |
| Threadmount | 1/4" – 20 mount |
| Power Requirements | 36W; 12V |
| Weight | 800g (1.75lbs) |
| Warranty | 2 years |
| Operating Environment | 0 to 27°C, 80% relative humidity non-condensing |
| Storage Temperature | -10 to 60°C |

applications

- High-resolution, high-speed imaging
- Live-cell fluorescence imaging
- Cell-trafficking studies
- Cell-motility studies

spectral response

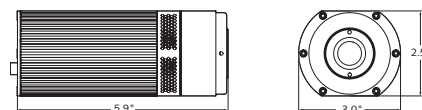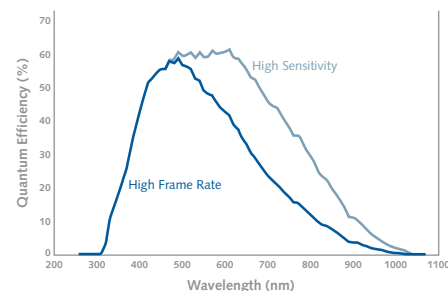

RoHS



*Refer to QImaging website for detailed listing of supported operating systems.

Note: Specifications are typical and subject to change.

Lightwire and Retiga are trademarks and QImaging is a registered trademark of QImaging Corporation. FireWire and Mac OS are trademarks of Apple Computer, Inc., registered in the U.S. and other countries.

Sony is a registered trademark of Sony Corporation.

Windows is a registered trademark of Microsoft Corporation in the United States and other countries.

Other brand and product names are the trademarks or registered trademarks of their respective owners and manufacturers.

| Digitizer Speed | 10MHz | | | | 20MHz | | | | 30MHz | | | |
|-------------------------|----------|----------|---------|---------|----------|----------|---------|---------|----------|----------|---------|---------|
| | 1x1 | 2x2 | 4x4 | 8x8 | 1x1 | 2x2 | 4x4 | 8x8 | 1x1 | 2x2 | 4x4 | 8x8 |
| Binning (Pixels) | 1x1 | 2x2 | 4x4 | 8x8 | 1x1 | 2x2 | 4x4 | 8x8 | 1x1 | 2x2 | 4x4 | 8x8 |
| Frame Rate (Full Field) | 5.9fps | 10.3fps | 18.7fps | 29.2fps | 10.9fps | 18.7fps | 29.3fps | 40.9fps | 15.1fps | 24.6fps | 36.1fps | 47.2fps |
| Full Well Capacity | 18,000e- | 27,000e- | | | 18,000e- | 27,000e- | | | 16,000e- | 27,000e- | | |
| Read Noise | 6.5e- | | | | 8e- | | | | 16e- | | | |
| Dynamic Range | 2769:1 | 4154:1 | | | 2250:1 | 3375:1 | | | 889:1 | 1688:1 | | |

Results are typical and may vary from camera to camera.



Tel 604.530.5800 ■ Fax 604.539.1825 ■ info@qimaging.com
www.qimaging.com

Rev A1